**READ ME !** 

Thank you for purchasing a Front Runner Spare Wheel Step.

Before you start, take a moment to familiarize yourself with the Fitting Instructions and the components received.

Refer to Page 2 for a list of all the components, quantities and tools required.

IMPORTANT WARNING! 

IT IS CRITICAL THAT ALL FRONT RUNNER PRODUCTS BE PROPERLY AND SECURELY ASSEMBLED AND ATTACHED TO YOUR VEHICLE. IMPROPER ATTACHMENT COULD RESULT IN AN AUTOMOBILE ACCIDENT, AND COULD CAUSE SERIOUS BODILY INJURY OR DEATH. YOU ARE RESPONSIBLE FOR ASSEMBLING AND SECURING ALL FRONT RUNNER PRODUCTS TO YOUR VEHICLE, CHECKING THE ATTACHMENTS PRIOR TO USE, AND PERIODICALLY INSPECTING THE PRODUCTS FOR ADJUSTMENT, WEAR AND DAMAGE. THEREFORE, YOU MUST READ AND UNDERSTAND ALL OF THE INSTRUCTIONS AND PRECAUTIONS SUPPLIED WITH YOUR FRONT RUNNER PRODUCT PRIOR TO INSTALLATION OR USE. IF YOU DO NOT UNDERSTAND ALL OF THE INSTRUCTIONS AND CAUTIONS, OR IF YOU HAVE NO MECHANICAL EXPERIENCE AND ARE NOT THOROUGHLY FAMILIAR WITH THE INSTALLATION PROCEDURES, YOU SHOULD HAVE THE PRODUCT INSTALLED BY A PROFESSIONAL INSTALLER OR OTHER QUALIFIED PERSONNEL.

NOTE: Front Runner will not be responsible for any damage caused by the failure to install the product according to these instructions.

Please call us if you have any questions about the installation of this product.

1


GET ORGANIZED

IN THE BOX

1	1 X	Wheel Step
2	1 X	5m Ratchet Strap

TOOLS NEEDED


FIGURE 1.1

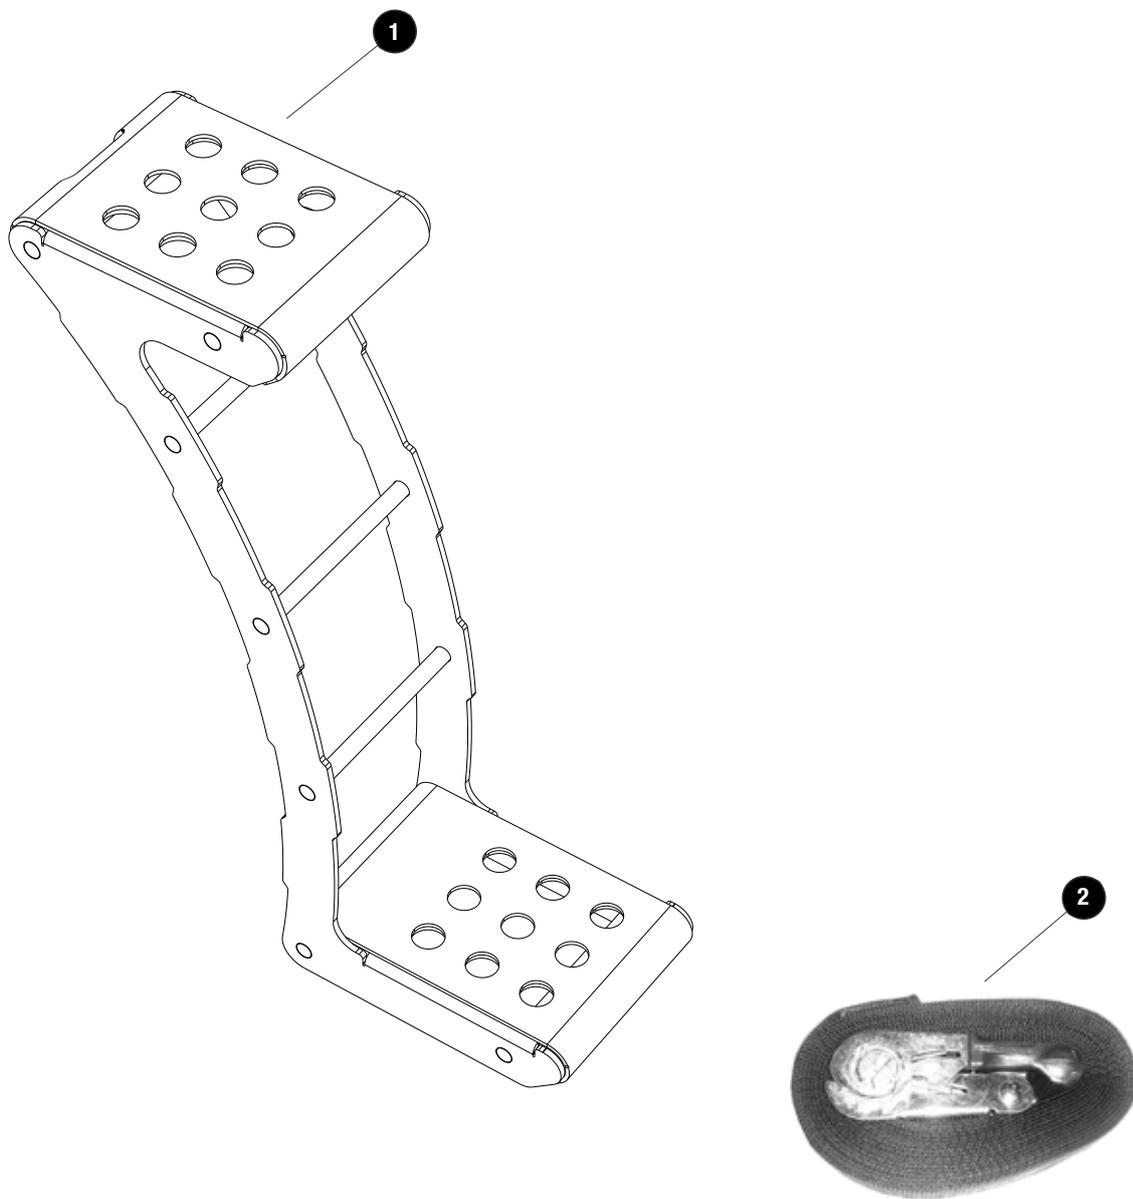

2

FIT AND SECURE

2.1

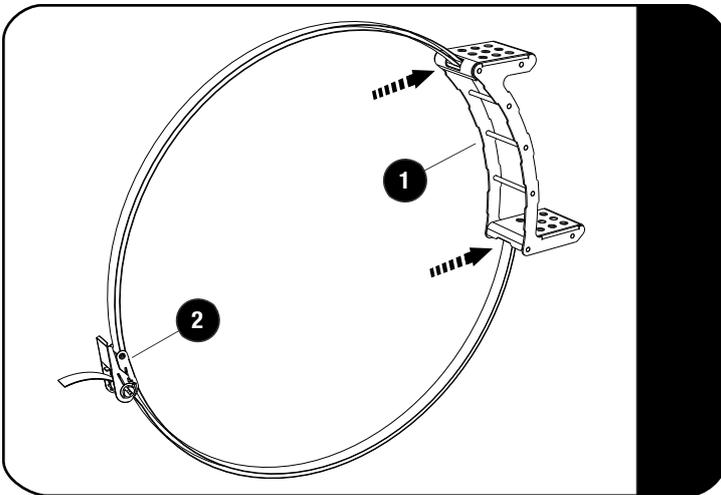


This product will only fit wheels with a diameter of 600 - 880mm (24 - 35 inches).



Feed the non - ratchet end of the Ratchet Strap (Item 2) over and around the top pin found at the back of the Wheel Step (Item 1) as shown.

Repeat this on the bottom pin as shown in 2.1.

2.2

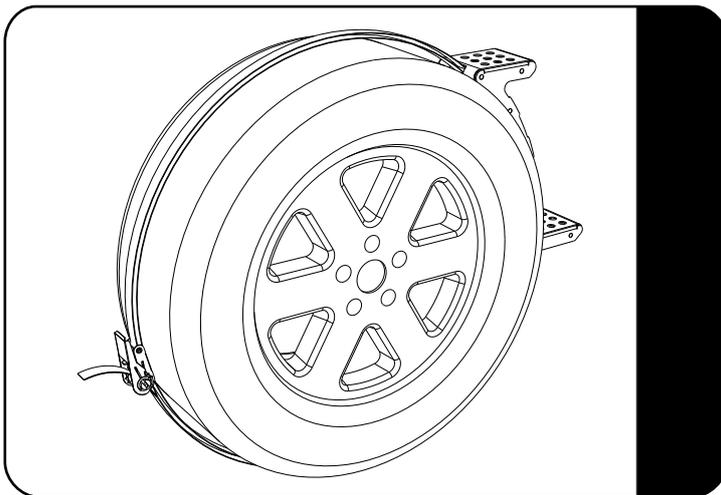

Place the step over the spare wheel and thread the end of the strap through the ratchet.



Before fastening the strap, carefully open and close the vehicle's rear doors to ensure the Wheel Step does not come in contact with the vehicle's body causing possible damage.

If contact or interference occurs, refit the Wheel Step to the opposite side of the spare wheel.

Once happy with the positioning of the Wheel Step, tighten the strap using the ratchet. Ensure that the strap and the Wheel Step are tight enough to support your body weight.

3

FINISH

Congratulations! You did it. Take a step back and admire your work!

4

INSTALL OTHER VEHICLE AND RACK ACCESSORIES

Now's the time to visit your favorite Front Runner Dealer in person or online.

Be sure to tag us. We love to see our gear in action! #FrontRunnerOutfitters #BornToRoam

Share your adventures on:    